

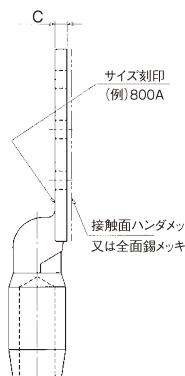
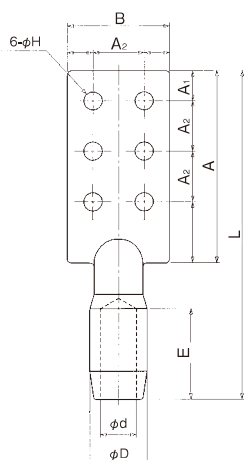


■圧縮形銅端子(JIS C2804 準拠品 円形圧縮導体用)

■C6型

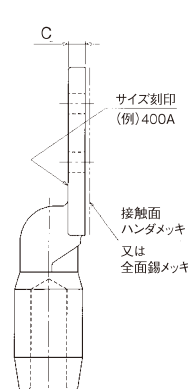



■C4型

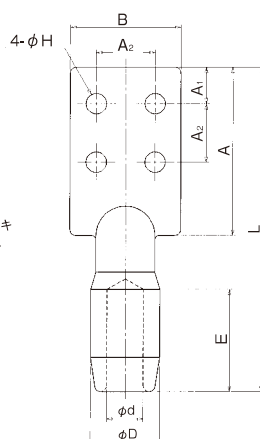



全面スズメッキ




■C2型

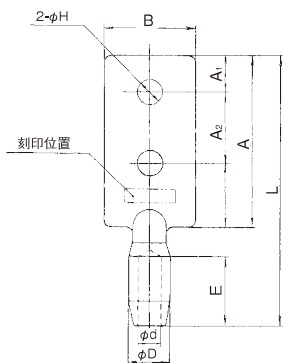

■C1型

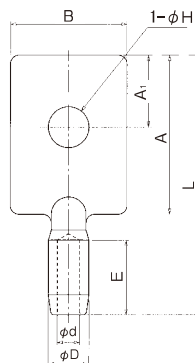

接触面のみハンダメッキ



型 番 (全面スズメッキ)	型 番 (接触面のみ ハンダメッキ)	導 体 断面積 (mm ²)	各 部 の 寸 法 (mm)										六角圧縮ダイス 対角寸法(mm)
			A	A ₁	A ₂	B	C	D	d	H	E	L	
C1- 14A-SN	C1- 14A	14	55	25	—	40	5	14	4.8	14	26	90	14
C1- 22A-SN	C1- 22A	22	55	25	—	40	5	14	5.9	14	26	90	14
C1- 38A-SN	C1- 38A	38	55	25	—	40	5	14	7.7	14	26	90	14
C1- 60A-SN	C1- 60A	60	55	25	—	40	5	19	9.7	14	30	94	19
C2- 22A-SN	C2- 22A	22	90	18	40	40	6	14	5.9	14	30	135	14
C2- 38A-SN	C2- 38A	38	90	18	40	40	6	14	7.7	14	30	135	14
C2- 60A-SN	C2- 60A	60	90	18	40	40	6	19	9.7	14	30	135	19
C2- 100A-SN	C2- 100A	100	95	20	40	50	8	23	12.5	14	39	150	23
C2- 150A-SN	C2- 150A	150	110	25	40	50	10	29	15.2	14	44	170	29
C2- 200A-SN	C2- 200A	200	110	25	40	50	10	32	17.6	14	53	180	32
C2- 250A-SN	C2- 250A	250	110	25	40	50	10	38	19.6	14	62	207	38
C2- 325A-SN	C2- 325A	325	115	25	40	50	10	42	22.5	14	62	212	42
C4- 325A-SN	C4- 325A	325	115	25	40	75	10	42	22.5	14	62	212	42
C4- 400A-SN	C4- 400A	400	115	25	40	75	12	47	24.9	14	70	222	47
C4- 500A-SN	C4- 500A	500	115	25	40	75	12	47	27.7	14	70	222	47
C6- 600A-SN	C6- 600A	600	155	25	40	75	12	51	30.5	14	70	262	51
C6- 800A-SN	C6- 800A	800	190	30	50	100	12	56	35.2	18	90	325	56
C6-1000A-SN	C6-1000A	1000	190	30	50	100	14	64	39.2	18	100	335	64