


■圧縮形銅管端子(JCAA D-003)

■TC-2形

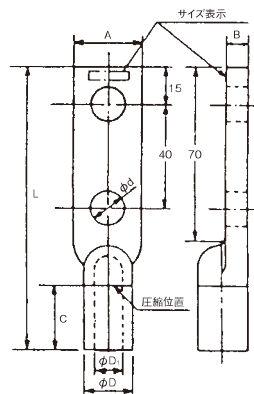


型番	導体 断面積 (mm ²)	各部の寸法 (mm)								六角圧縮ダイス 対角寸法 (mm)
		D	D ₁	d	A	B	C	L		
TC2- 14	14	12	5.1	9	15	6.9	25	115		12
TC2- 22	22	12	6.3	9	16	5.7	25	115		12
TC2- 38	38	14	8.2	9	19	5.8	25	115		14
TC2- 60	60	19	10.5	14	25	8.5	25	120		19
TC2-100	100	23	13.6	14	31	9.4	25	120		23
TC2-150	150	26	16.8	14	36	9.2	30	130		26
TC2-200	200	29	19.0	14	40	10.0	30	135		29
TC2-250	250	32	21.6	14	45	10.4	30	135		32
TC2-325	325	36	24.4	14	50	11.6	35	145		36


(注)●圧縮形銅管端子は円形圧縮導体および円形撚線導体の両方に適用できます。

■はんだ付け形銅管端子(JCAA D-002)

■T-100A型

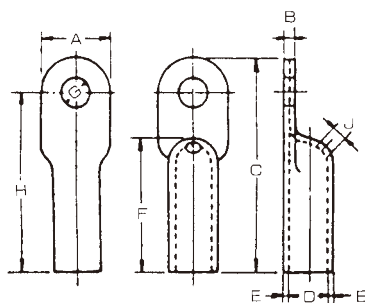

■T-100B型

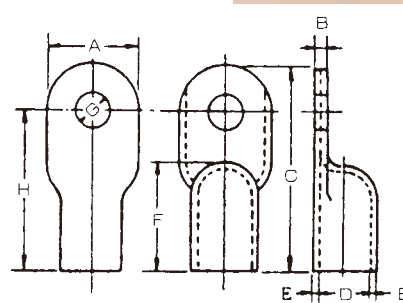

型番	導体 断面積 (mm ²)	各部の寸法 (mm)								
		A	B	C	D	E	F	G	H	J
T-106A	14以下	11	2	38	6.0	1.0	24	6	32	—
T-107A	22	14	2.8	48	7.2	1.4	31	7	41	3
T-109A	38	17	2.8	51	9.2	1.4	32	7	43	4
T-111A	60	20	2.8	63	11.0	1.4	41	9	55	5
T-114A	100	26	4.0	74	14.0	2.0	48	11	63	6
T-117A	150	32	6.0	92	17.0	3.0	56	17	76	8
T-120A	200	38	6.0	101	20.0	3.0	65	17	85	8
T-122A	250	41	7.0	114	22.0	3.5	73	22	95	9
T-125A	325	46	7.0	114	25.0	3.5	74	22	95	9

(注)T-106Aのハンダ孔 Jは不要

型番	導体 断面積 (mm ²)	各部の寸法 (mm)							
		A	B	C	D	E	F	G	H
T-106B	14以下	11	2	29	6.0	1.0	15	6	23
T-107B	22	14	2.8	35	7.2	1.4	18	7	28
T-109B	38	17	2.8	41	9.2	1.4	22	7	33
T-111B	60	20	2.8	48	11.0	1.4	26	9	40
T-114B	100	26	4.0	58	14.0	2.0	32	11	47
T-117B	150	32	6.0	73	17.0	3.0	37	17	57
T-120B	200	38	6.0	78	20.0	3.0	42	17	62
T-122B	250	41	7.0	89	22.0	3.5	48	22	70
T-125B	325	46	7.0	89	25.0	3.5	48	22	70